


### Answer on Question #59473-Engineering-Mechanical Engineering

A vehicle of mass 700 kg accelerates uniformly from rest to a velocity of 60 kmh<sup>-1</sup> in 10 s whilst ascending a 15% gradient. The frictional resistance to motion is 0.5 kN. Making use of D'Alembert's principle, determine:

- i) the tractive effort between the wheels and the road surface
- ii) the work done in ascending the slope
- iii) the average power developed by the engine

#### Solution

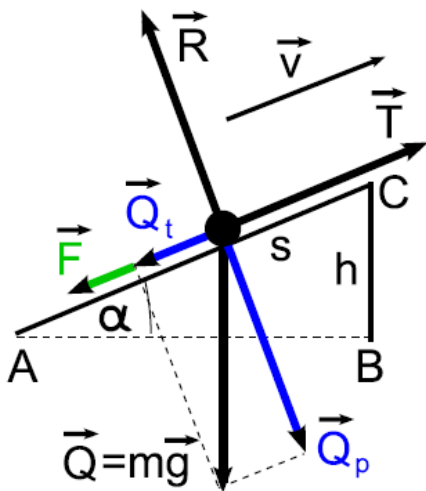

The picture shows forces acting on the vehicle. There are: the gravitational force  $\vec{Q} = m\vec{g}$ , the reaction of road's surface  $\vec{R}$  and frictional force  $\vec{F}$ , working against the vehicle's velocity  $\vec{v}$ .

The problem's text claims that the vehicle is ascending so the vectors  $\vec{v}$  and  $\vec{F}$  have directions as in the picture. The vehicle is moved uphill by the tractive force  $\vec{T}$  which does the real work.

The force  $\vec{Q}$  can be split into 2 compounds:  $\vec{Q}_p$ , perpendicular to

the road surface and  $\vec{Q}_t$  parallel to the road. The vector sum of  $\vec{Q}_p + \vec{R}$  gives zero but  $\vec{Q}_t$  is that force which causes the frictional resistance.

Using a vector notation one may write the Newton's second law of dynamics for the vehicle as follows:

$$m\vec{a} = \vec{T} + \vec{Q}_t + \vec{F} \quad (1)$$

Because vectors  $\vec{F}$  and  $\vec{Q}_t$  are opposite to  $\vec{T}$  one should take their values with a minus sign in the next equation. In addition because the angle between  $\vec{Q}$  and  $\vec{Q}_p$  equals  $\alpha$  (the same as the slope of the road) the value of  $\vec{Q}_t$  may be written as  $mg \sin(\alpha)$ . Therefore:

$$ma = T - mg \sin \alpha - F \quad (2)$$

From the equation (2) one may calculate the value of the tractive effort  $T$ . The acceleration  $a$  may be calculated as  $a = \frac{v}{t}$ , where  $v$  is the given velocity, ( $v = 100 \text{ km/h}$ ) and  $t$  is the acceleration time ( $t = 14 \text{ s}$ ). From eq. (2), substituting  $a$  one obtains:

$$T = m \frac{v}{t} + F + mg \sin \alpha \quad (3)$$

Let put numeric values into equation (3). The velocity must be expressed in  $\frac{m}{s}$  (by dividing it by 3.6). Sinus  $\alpha$  is the "gradient", equals 0.15.

$$T = 700 \cdot \frac{60}{\frac{3.6}{10}} + 500 + 700 \cdot 10 \cdot 0.15 = 2.7 \text{ kN}. \quad (4)$$

The work  $W$  done in ascending the slope equals  $T$  times  $s$ , where  $s$  is the slope length. (The vector  $\vec{T}$  is parallel the road so  $\cos(\varphi)$  equals 1 in the formula for mechanical work). The length  $s$  can be calculated from equation (5)

$$s = \frac{1}{2}at^2 = \frac{1}{2}\frac{v}{t}t^2 = \frac{v}{2}t \quad (5)$$

The last formula above on the right side shows that in a uniformly accelerating movement the distance  $s$  can be calculated by multiplying time by the average velocity. Therefore the amount of work  $W$  equals:

$$W = Fs = \frac{Tvt}{2} \quad (6)$$

Using the value of  $F$  from eq. (4) the above formula gives:

$$W = 12 \cdot 2.7 \cdot 10^3 \cdot \left(\frac{60}{3.6}\right) \cdot 10 = 225 \text{ kJ}. \quad (7)$$

The average power  $P$  equals  $W$  divided by time  $t$ , therefore:

$$P = \frac{W}{t} = \frac{225 \text{ kJ}}{10 \text{ s}} = 22.5 \text{ kW}. \quad (8)$$

**Answer: 2.7 kN; 225 kJ; 22.5 kW.**